


## HANSADESIGNO trim kit single-lever mixer for all 4-hole installation units

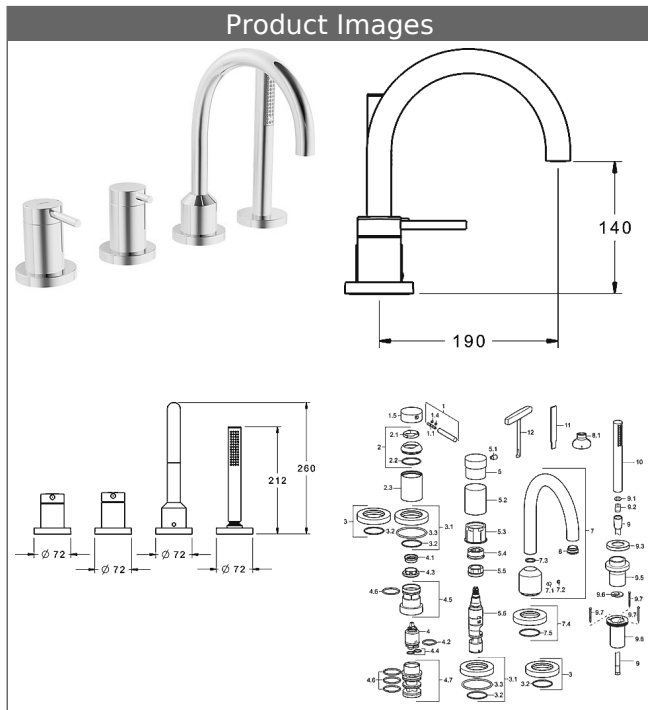

### Description

HANSADESIGNO  
trim kit single-lever mixer  
for all 4-hole installation units

P-IX\* (PA-IX submitted)  
flow rate: 20/13 l/min (spout/shower), at 3 bar hydraulic pressure

- consisting of:
- single-lever mixer - control parts and trim kit
- lever HANSADESIGNO
- diverter - control parts and trim kit HANSADESIGNO
- HANSADESIGNO pillar spout
- hose guide, revolving - trim kit
- HANSASTILO hand shower
- (-) 1-spray
- (-) strainer
- shower hose, 1750 mm, silver-grey
- (-) exchangeable via tiles

projection: 190 mm

| Model  | Item No. |  |
|--------|----------|--|
| chrome | 53122073 |  |

suitable for installation unit 5302/5304/5308


For the complete unit please order separately trim kit and concealed base unit




Product Image




Product Drawing

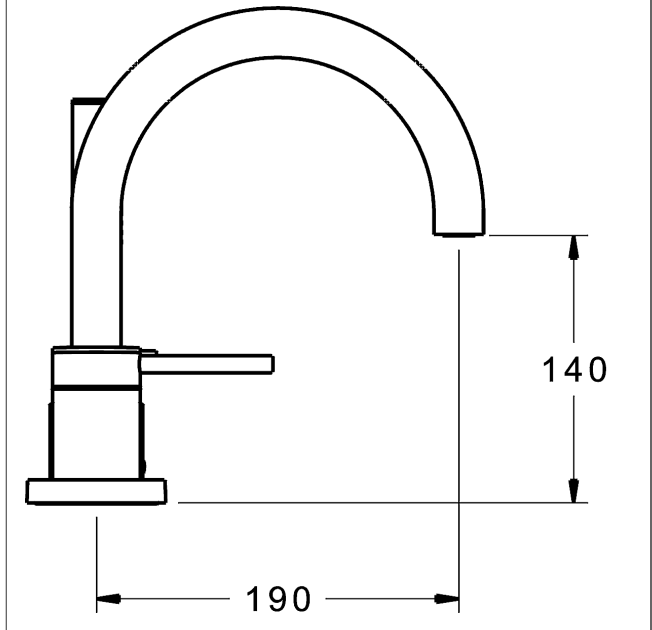




Product Drawing

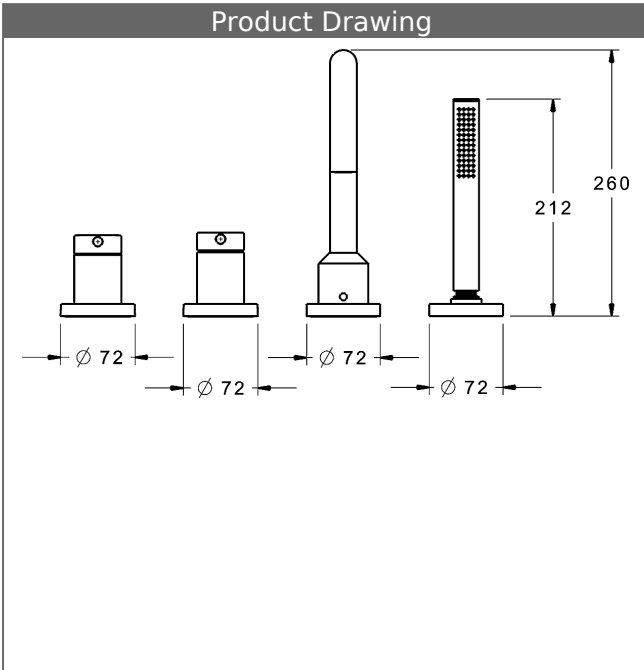

Product Drawing

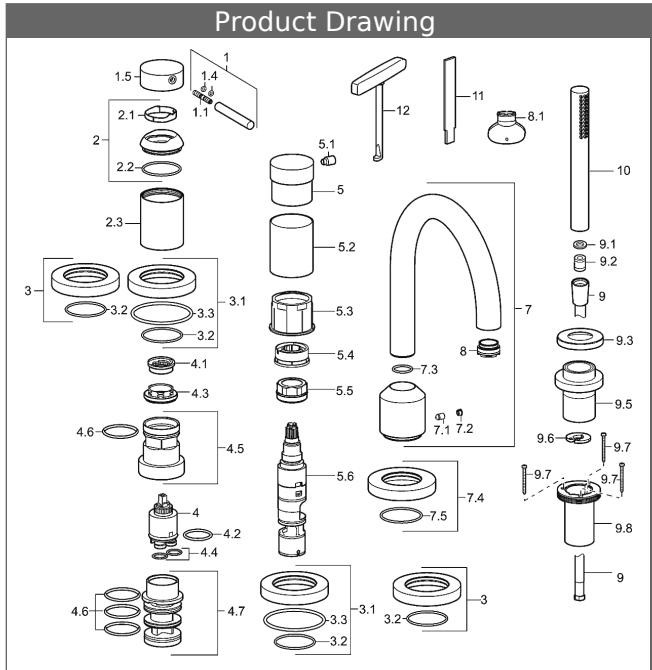

## Related Products

| Image:   | Description:  | Model / Item No.:          |
|--|---|----------------------------|
|   | <p><b>HANSACOMPACT 4-hole rim-mounted installation unit for pillar spout, DN 20 for pillar mounting</b></p> <p>installation depth: continuously adjustable from 495-650 mm<br/>with flexible hose G 3/4 x G 3/4, 1000 mm<br/>can be assembled with all 4-hole trim kits</p> | <p>chrome<br/>53020200</p> |
|   | <p><b>HANSA 4-hole rim-mounted installation unit, DN 20</b></p> <p>with flexible connecting hoses G 3/4<br/>can be assembled with all 4-hole trim kits</p>  | <p>chrome<br/>53040200</p> |
|  | <p><b>HANSACOMPACT wall-mounted and renovation unit for 4-hole tiled rim assembly with installation unit, DN 20 for pillar spout, DN 20</b></p> <p>with connection hoses G 3/4<br/>can be assembled with all 4-hole trim kits</p>   | <p>chrome<br/>53080200</p> |