


HANSALOFT single-lever bath mixer, DN 15 G1/2 ground-standing

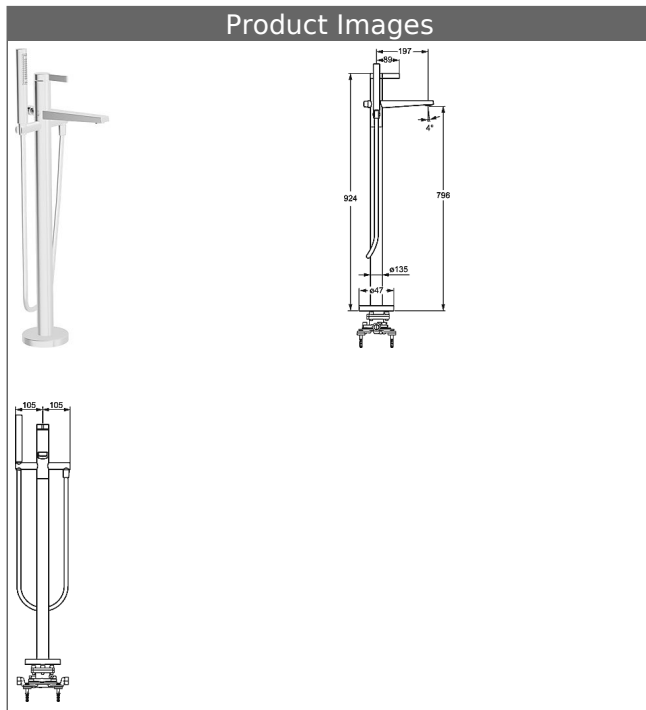

Description

HANSALOFT
single-lever bath mixer, DN 15 G1/2
ground-standing

flow rate: 20/13 l/min (spout/shower), at 3 bar hydraulic pressure

- body: DR brass (MS 63)
- operating lever (metal)
- CACHÉ® flow straightener with fitting wrench
- (-) improved limescale protection with the HONEYCOMB® structure
- HANSASTILO hand shower
- shower bracket: revolving
- diverter - automatic shower to bath reset
- round rosette, additionally enclosed
- protected against back-flow in domestic use (according to DIN EN 1717)

projection: 197 mm

HANSA control cartridge classic 3.5

Item No.: 59913075

Qty: 1


- (-) ceramic discs with integrated grease wells
- (-) adjustable hot water stop
- (-) volume restrictor indefinitely variable up to approx. 6 l/min

HANSA control cartridge classic 3.5

Item No.: 59913075

Qty: 1

- (-) ceramic discs with integrated grease wells
- (-) adjustable hot water stop
- (-) volume restrictor indefinitely variable up to approx. 6 l/min

| Model | Item No. | |
|--------|----------|---|
| chrome | 57762073 |  |

suitable for installation unit 5328 0100


For the complete unit please order separately trim kit and concealed base unit




Product Image



Product Drawing

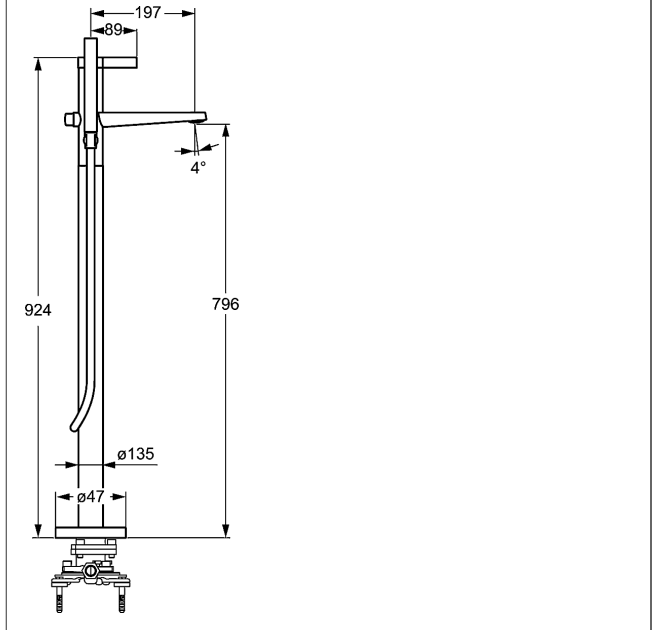

Product Drawing

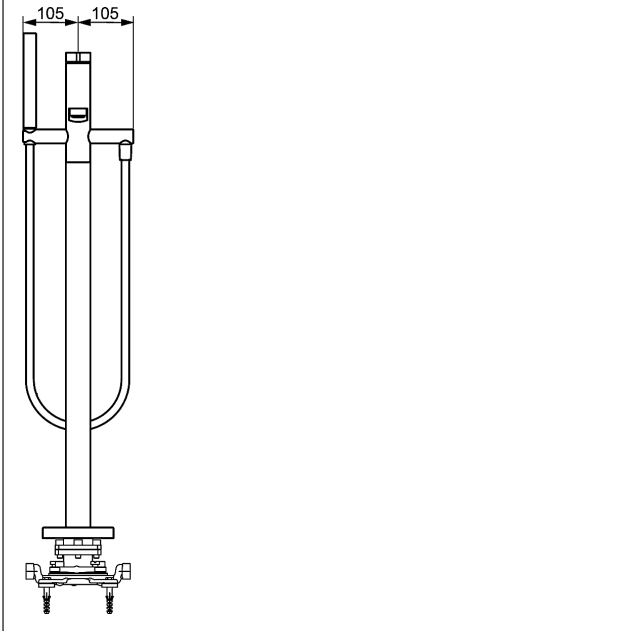

Related Products

| Image: | Description: | Model / Item No.: |
|---|---|--------------------------|
|  | HANSAVARIO installation unit, DN 15 (G1/2) for bath faucets ground-standing | 53280100 |