


## HANSA concealed valve with ceramic discs

G 1/2 threaded connection

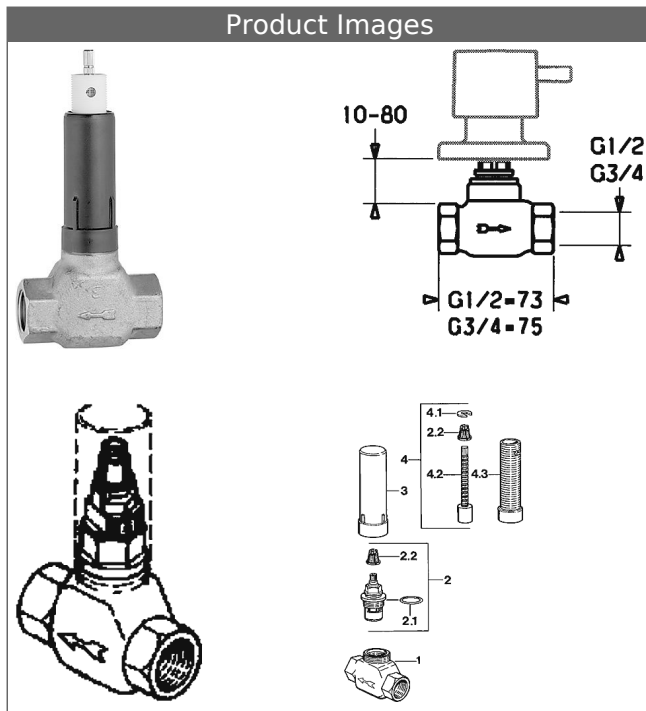


## Description

HANSA concealed valve with ceramic discs  
G 1/2 threaded connection

flow rate: up to 30 l/min


- body: DR brass (MS 63)
- ceramic disc headpart, DN 20
- installation depth 10-80 mm
- leak water protective sleeve

Model	Item No.
	02250100 


Product Image



Product Drawing

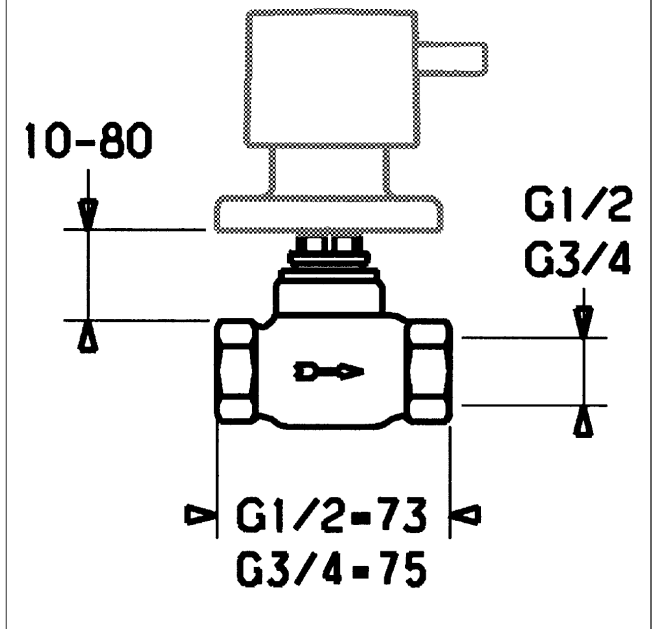

Product Drawing

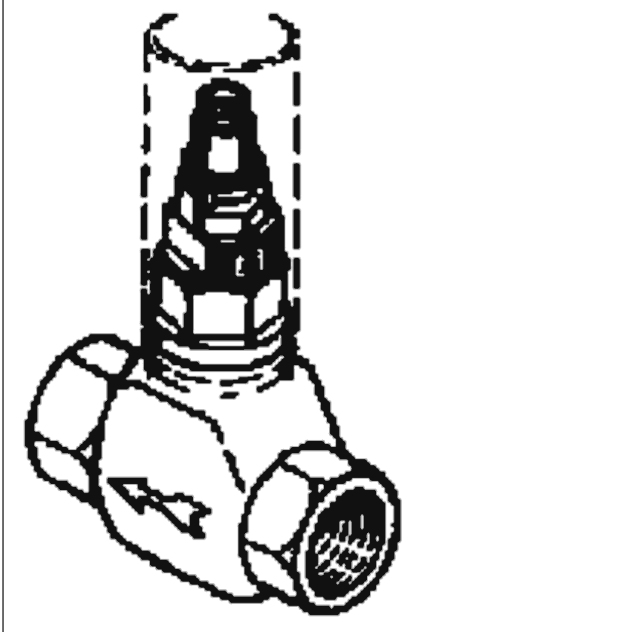

Product Drawing

