


## Hansa concealed valve with Präzisa spindle headpart soldered connection DN 15 (15 mm)

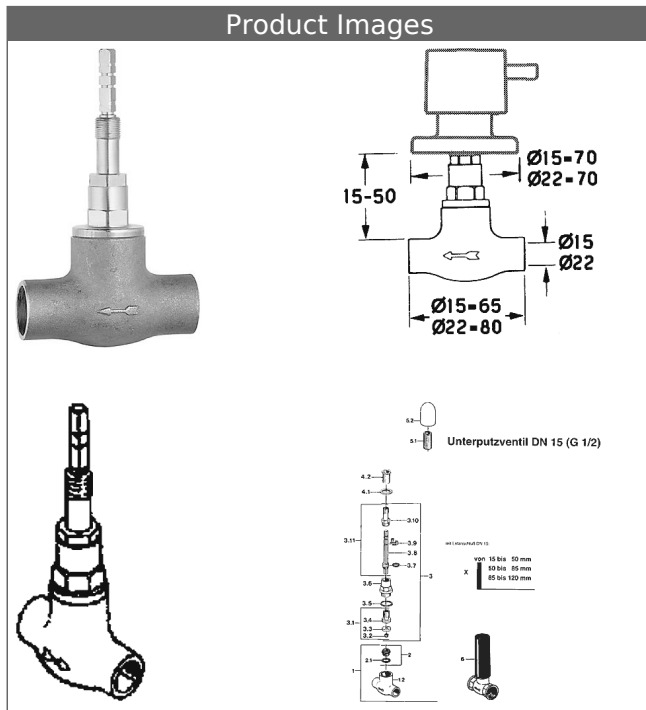

## Description

Hansa concealed valve with Präzisa spindle headpart  
soldered connection  
DN 15 (15 mm)

flow rate: up to 30 l/min

- body: DR brass (MS 63)
- Präzisa spindle headpart
- exchangeable valve seat
- installation depth: 20-55 mm (solder connection)

## Model

## Item No.


02300100




Product Image



Product Drawing

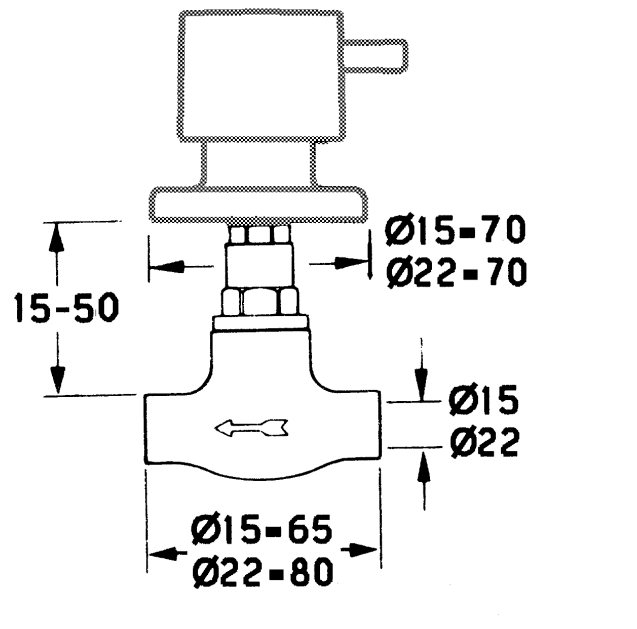

Product Drawing

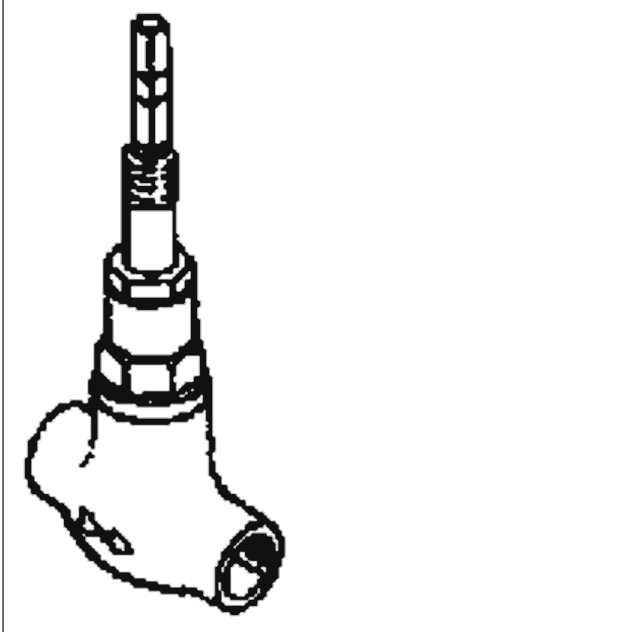

Product Drawing

