


HANSA 4-hole rim-mounted installation unit, DN 20

with flexible connecting hoses G 3/4 can be assembled with all 4-hole trim kits

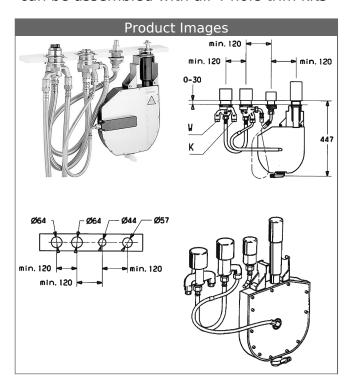

Description

HANSA 4-hole rim-mounted installation unit, DN 20 with flexible connecting hoses G 3/4 can be assembled with all 4-hole trim kits

- Installation set consisting of:
- installation unit: DR brass (MS 63)
- installation unit for ceramic diverter
- installation unit for pillar bathtub spout
- rinsing and pressure plug
- ROLLBOX with automatic hose rewind
- (-) water leakage drain in ROLLBOX with backflow protection
- tapping sleeve for bathtub overflows (not necessary with HANSAFILL)
- set of flexible hoses G 3/4 x G 3/4 (2 x 1000 mm, 1 x 800 mm)
- installation of an access cover necessary!
- protected against back-flow in domestic use (according to DIN EN 1717)

Model	Item No.	
chrome	53040200	M

not to be used for wall-mounting





