


HANSALIVING

trim kit installation set 16 thermostatic mixer, DN 15 (G1/2)

suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT, HANSADESIGNO, HANSALIGNA, HANSASTECLA,
HANSARONDA,
wall bar set 1100 mm
HANSARAIN overhead shower

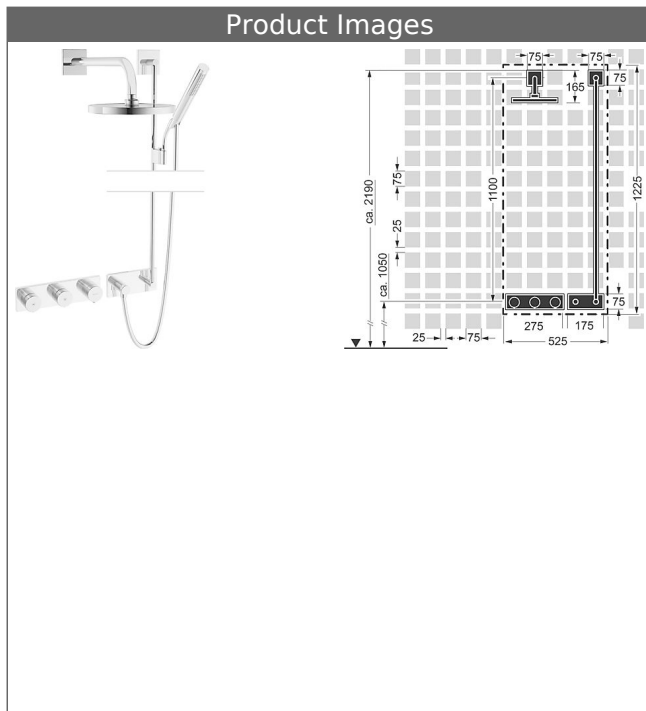

Description

HANSALIVING
trim kit installation set 16
thermostatic mixer, DN 15 (G1/2)
suitable for HANSAMATRIX Tiptronik installation unit
suitable for HANSASIGNATUR, HANSALOFT,
HANSADESIGNO, HANSALIGNA, HANSASTECLA,
HANSARONDA,
wall bar set 1100 mm
HANSARAIN overhead shower

- power supply unit 230 V/50-60 Hz, operative voltage 12 V
- control unit

HANSARAIN overhead shower, DN 15 for wall-mounting

shower head, solid brass Ø 220 mm
also compatible with HANSAMATRIX
Item No.: 04180300
Qty: 1
with shower arm 400 mm
(-) reinforced edition, pipe Ø 26 mm
connection G 1/2
mounting flange and additional fastening plate
wall connection plate square, twist-resistant
flow limiter
ball joint connection: 45° swivel
limescale protection technology


HANSA|LIVING shower set

with wall connection elbow
Item No.: 44430100
Qty: 1
HANSASTILO hand shower
Silverjet® shower hose 1250 mm, chrome optic
wall-mounted shower bracket
wall connection elbow

HANSALIVING electronic thermostatic mixer, DN 15 (G1/2) suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT,
HANSADESIGNO, HANSALIGNA, HANSASTECLA,
HANSARONDA,
for 2 outlets
rosette without screws
Item No.: 44729503
Qty: 1
temperature control handle (metal) with safety stop at 38°C

HANSATIPTRONIK pushbutton with LED indicator
sleeve and wall rosette
trim plate frame
control unit
mains supply 230 V/50-60 Hz, operating voltage 12 V

Model	Item No.	
chrome	44870160	

suitable for concealed installation package
HANSAMATRIX Tiptronik 4486 0090

Connection cable and concealed box are included in the
concealed package



