


HANSA|LIVING
trim kit installation set 14.1
thermostatic mixer, DN 15 (G1/2)
suitable for HANSAMATRIX Tiptronik installation unit
 suitable for HANSASIGNATUR, HANSALOFT, HANSADESIGNO, HANSALIGNA, HANSASTECLA,
 HANSARONDA,
 wall bar set 1100 mm
 HANSARAIN overhead shower

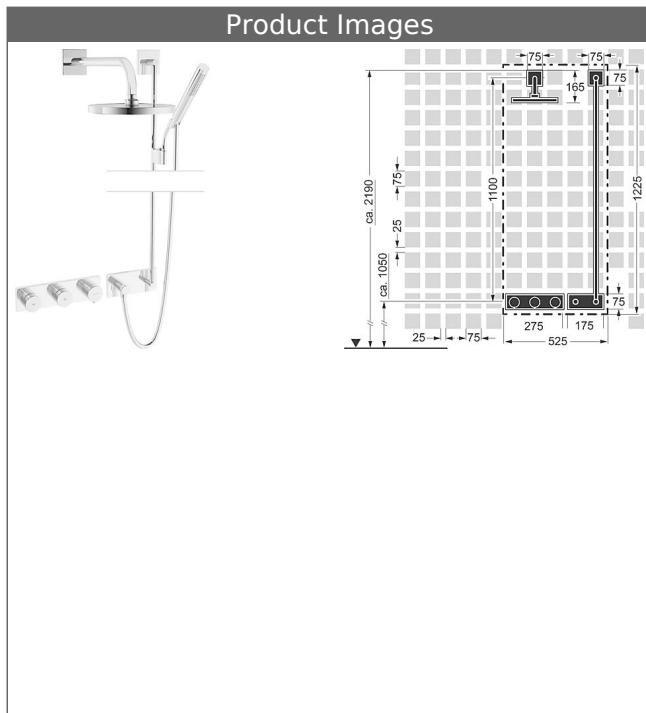

Description

HANSA|LIVING
 trim kit installation set 14.1
 thermostatic mixer, DN 15 (G1/2)
 suitable for HANSAMATRIX Tiptronik installation unit
 suitable for HANSASIGNATUR, HANSALOFT,
 HANSADESIGNO, HANSALIGNA, HANSASTECLA,
 HANSARONDA,
 wall bar set 1100 mm
 HANSARAIN overhead shower

- power supply unit 230 V/50-60 Hz, operative voltage 12 V
- control unit

HANSARAIN
overhead shower, DN 15
for wall-mounting

shower head, solid brass \varnothing 220 mm
 also compatible with HANSAMATRIX
 Item No.: 04180300
 Qty: 1
 with shower arm 400 mm
 (-) reinforced edition, pipe \varnothing 26 mm
 connection G 1/2
 mounting flange and additional fastening plate
 wall connection plate square, twist-resistant
 flow limiter
 ball joint connection: 45° swivel
 limescale protection technology


HANSA|LIVING
shower set

with wall connection elbow
 Item No.: 44430100
 Qty: 1
 HANSASTILO hand shower
 Silverjet® shower hose 1250 mm, chrome optic
 wall-mounted shower bracket
 wall connection elbow

HANSA|LIVING
trim kit
electronic thermostatic mixer, DN 15 (G1/2)
suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT,
 HANSADESIGNO, HANSALIGNA, HANSASTECLA,
 HANSARONDA,
 for 2 outlets
 rosette without screws
 Item No.: 44729503
 Qty: 1
 temperature control handle (metal) with safety stop at

38°C
 HANSATIPTRONIK pushbutton with LED indicator
 sleeve and wall rosette
 trim plate frame
 control unit
 mains supply 230 V/50-60 Hz, operating voltage 12 V

Model	Item No.	
chrome	44870160	

suitable for concealed installation package
 HANSAMATRIX Tiptronik 4486 0090

Connection cable and concealed box are included in the
 concealed package



