


HANSALIVING
trim kit installation set 16
thermostatic mixer, DN 15 (G1/2)
suitable for HANSAMATRIX Tiptronik installation unit
 suitable for HANSASIGNATUR, HANSALOFT, HANSADESIGNO, HANSALIGNA, HANSASTECLA,
 HANSARONDA,
 wall bar set 1100 mm
 HANSARAIN overhead shower

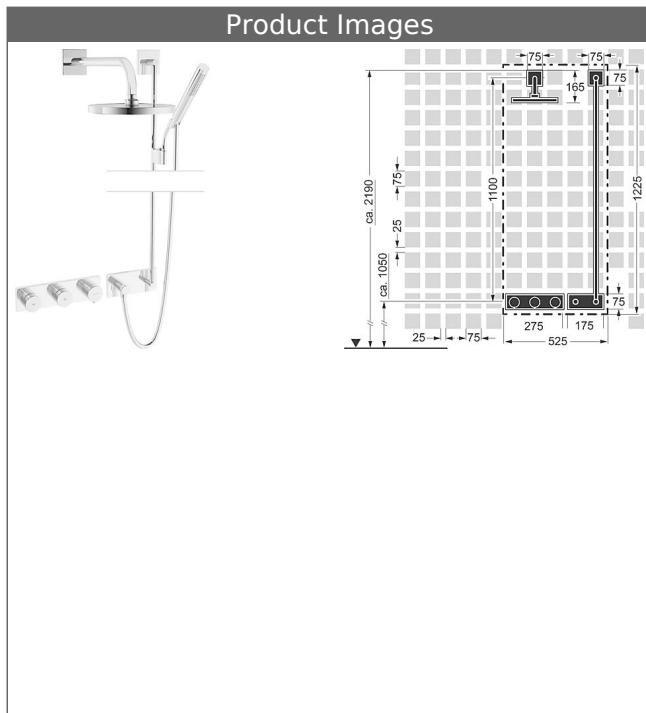

Description

HANSALIVING
 trim kit installation set 16
 thermostatic mixer, DN 15 (G1/2)
 suitable for HANSAMATRIX Tiptronik installation unit
 suitable for HANSASIGNATUR, HANSALOFT,
 HANSADESIGNO, HANSALIGNA, HANSASTECLA,
 HANSARONDA,
 wall bar set 1100 mm
 HANSARAIN overhead shower

- power supply unit 230 V/50-60 Hz, operative voltage 12 V
- control unit

HANSARAIN **overhead shower, DN 15** **for wall-mounting**

shower head, solid brass Ø 220 mm
 also compatible with HANSAMATRIX
 Item No.: 04180300
 Qty: 1
 with shower arm 400 mm
 (-) reinforced edition, pipe Ø 26 mm
 connection G 1/2
 mounting flange and additional fastening plate
 wall connection plate square, twist-resistant
 flow limiter
 ball joint connection: 45° swivel
 limescale protection technology

HANSA|LIVING **shower set**

with wall connection elbow
 Item No.: 44430100
 Qty: 1
 HANSASTILO hand shower
 Silverjet® shower hose 1250 mm, chrome optic
 wall-mounted shower bracket
 wall connection elbow

HANSALIVING **electronic thermostatic mixer, DN 15 (G1/2)** **suitable for HANSAMATRIX Tiptronik installation unit**

suitable for HANSASIGNATUR, HANSALOFT,
 HANSADESIGNO, HANSALIGNA, HANSASTECLA,
 HANSARONDA,
 for 2 outlets
 rosette without screws
 Item No.: 44729503
 Qty: 1
 temperature control handle (metal) with safety stop at 38°C


HANSATIPTRONIK pushbutton with LED indicator
sleeve and wall rosette
trim plate frame
control unit
mains supply 230 V/50-60 Hz, operating voltage 12 V

Model	Item No.
chrome	44870160



suitable for concealed installation package
HANSAMATRIX Tiptronik 4486 0090

Connection cable and concealed box are included in the
concealed package



Product Image



Product Drawing

