


**HANSALIVING**  
**trim kit installation set 16**  
**thermostatic mixer, DN 15 (G1/2)**

**suitable for HANSAMATRIX Tiptronik installation unit**

suitable for HANSASIGNATUR, HANSALOFT, HANSADESIGNO, HANSALIGNA, HANSASTECLA, HANSARONDA,

wall bar set 1100 mm

HANSAVIVA overhead shower

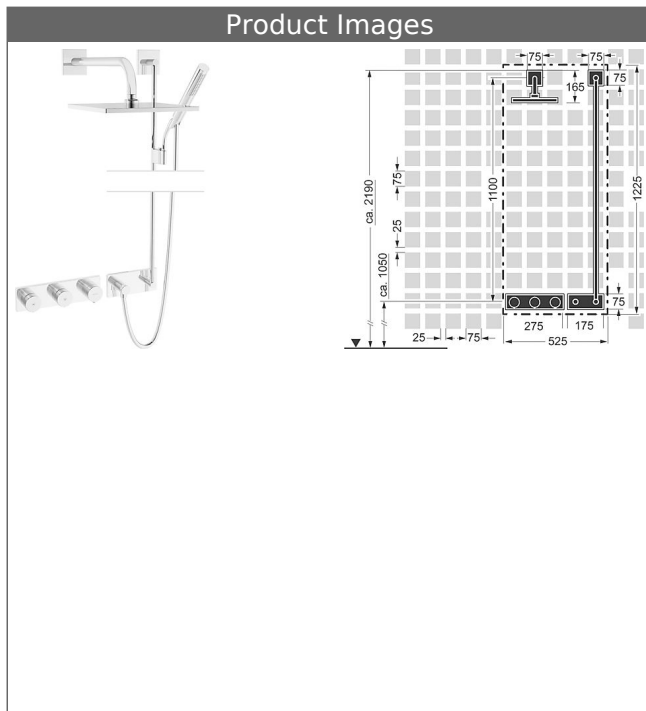

**Description**

HANSALIVING  
 trim kit installation set 16  
 thermostatic mixer, DN 15 (G1/2)  
 suitable for HANSAMATRIX Tiptronik installation unit  
 suitable for HANSASIGNATUR, HANSALOFT,  
 HANSADESIGNO, HANSALIGNA, HANSASTECLA,  
 HANSARONDA,  
 wall bar set 1100 mm  
 HANSAVIVA overhead shower

- power supply unit 230 V/50-60 Hz, operative voltage 12 V
- control unit

**HANSA|LIVING**  
**wall bar set 1100 mm**

with wall connection elbow

Item No.: 44420100

Qty: 1

wall bar

1100 mm, Ø 18 mm

length can be shortened

HANSASTILO hand shower

Silverjet® shower hose 1600 mm, chrome optic

height adjustment: push button control

slide: swivelling

flexible shower holder

wall connection elbow

**HANSAVIVA**  
**overhead shower, DN 15**  
**for wall-mounting**

shower head square 250 x 250 mm

also compatible with HANSAMATRIX

Item No.: 04180340

Qty: 1

with shower arm 400 mm

(-) reinforced edition, pipe Ø 26 mm

connection G 1/2

mounting flange and additional fastening plate

wall connection plate square, twist-resistant

ball joint connection: 56° swivel

limescale protection technology

**HANSALIVING**  
**electronic thermostatic mixer, DN 15 (G1/2)**  
**suitable for HANSAMATRIX Tiptronik installation unit**

suitable for HANSASIGNATUR, HANSALOFT,

HANSADESIGNO, HANSALIGNA, HANSASTECLA,

HANSARONDA,

for 2 outlets

rosette without screws

Item No.: 44729503

Qty: 1


temperature control handle (metal) with safety stop at 38°C

HANSATIPTRONIK pushbutton with LED indicator sleeve and wall rosette

trim plate frame

control unit

mains supply 230 V/50-60 Hz, operating voltage 12 V

Model	Item No.	
chrome	44870161	

suitable for concealed installation package  
HANSAMATRIX Tiptronik 4486 0090

Connection cable and concealed box are included in the concealed package





