


HANSALIVING
trim kit installation set 16
thermostatic mixer, DN 15 (G1/2)

suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT, HANSADESIGNO, HANSALIGNA, HANSASTECLA, HANSARONDA,

wall bar set 1100 mm

HANSAVIVA overhead shower

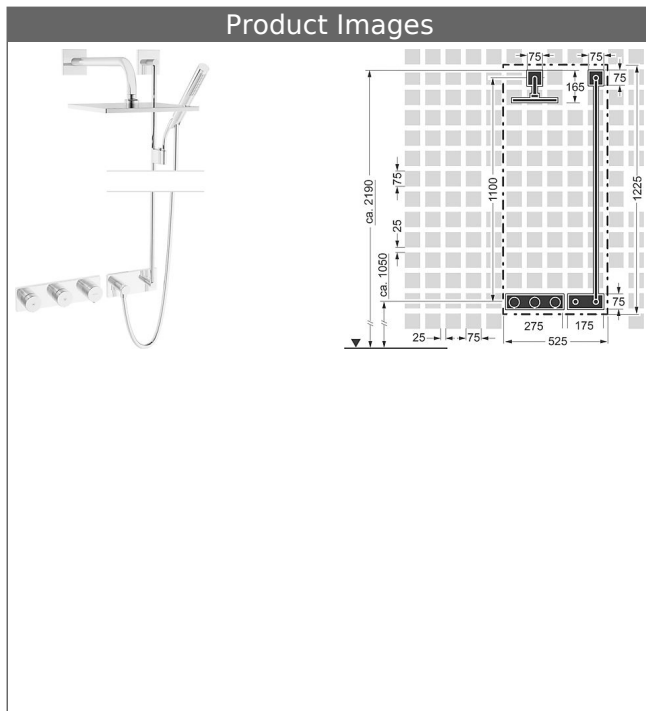

Description

HANSALIVING
 trim kit installation set 16
 thermostatic mixer, DN 15 (G1/2)
 suitable for HANSAMATRIX Tiptronik installation unit
 suitable for HANSASIGNATUR, HANSALOFT,
 HANSADESIGNO, HANSALIGNA, HANSASTECLA,
 HANSARONDA,
 wall bar set 1100 mm
 HANSAVIVA overhead shower

- power supply unit 230 V/50-60 Hz, operative voltage 12 V
- control unit

HANSA|LIVING
wall bar set 1100 mm

with wall connection elbow

Item No.: 44420100

Qty: 1

wall bar

1100 mm, Ø 18 mm

length can be shortened

HANSASTILO hand shower

Silverjet® shower hose 1600 mm, chrome optic

height adjustment: push button control

slide: swivelling

flexible shower holder

wall connection elbow

HANSAVIVA
overhead shower, DN 15
for wall-mounting

shower head square 250 x 250 mm

also compatible with HANSAMATRIX

Item No.: 04180340

Qty: 1

with shower arm 400 mm

(-) reinforced edition, pipe Ø 26 mm

connection G 1/2

mounting flange and additional fastening plate

wall connection plate square, twist-resistant

ball joint connection: 56° swivel

limescale protection technology

HANSALIVING
electronic thermostatic mixer, DN 15 (G1/2)
suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT,

HANSADESIGNO, HANSALIGNA, HANSASTECLA,

HANSARONDA,

for 2 outlets

rosette without screws

Item No.: 44729503

Qty: 1


temperature control handle (metal) with safety stop at 38°C

HANSATIPTRONIK pushbutton with LED indicator sleeve and wall rosette

trim plate frame

control unit

mains supply 230 V/50-60 Hz, operating voltage 12 V

Model	Item No.	
chrome	44870161	

suitable for concealed installation package
HANSAMATRIX Tiptronik 4486 0090

Connection cable and concealed box are included in the concealed package



