


HANSALIVING
trim kit installation set 17
thermostatic mixer, DN 15 (G1/2)

suitable for HANSAMATRIX Tiptronik installation unit
 suitable for HANSASIGNATUR, HANSALOFT, HANSADESIGNO, HANSALIGNA, HANSASTECLA,
 HANSARONDA,
 shower set
 HANSAVIVA overhead shower

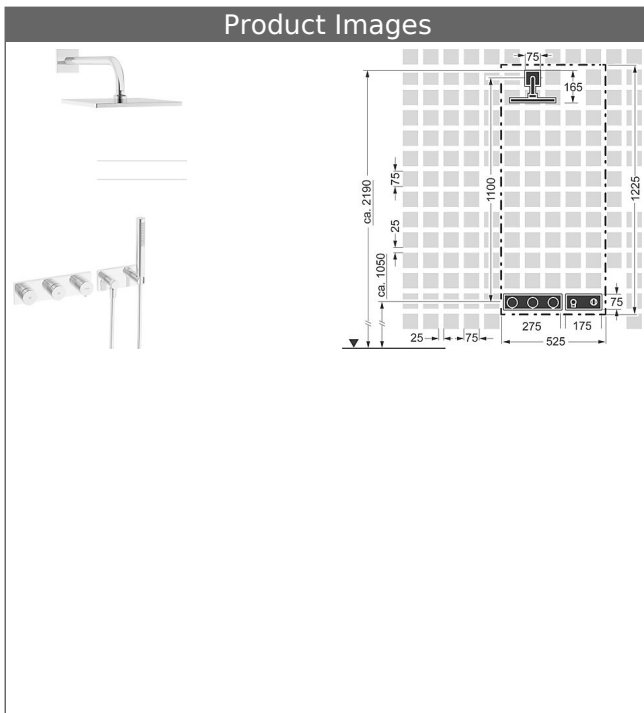

Description

HANSALIVING
 trim kit installation set 17
 thermostatic mixer, DN 15 (G1/2)
 suitable for HANSAMATRIX Tiptronik installation unit
 suitable for HANSASIGNATUR, HANSALOFT,
 HANSADESIGNO, HANSALIGNA, HANSASTECLA,
 HANSARONDA,
 shower set
 HANSAVIVA overhead shower

- power supply unit 230 V/50-60 Hz, operative voltage 12 V
- control unit

HANSA|LIVING
shower set

with wall connection elbow
 Item No.: 44430100
 Qty: 1
 HANSASTILO hand shower
 Silverjet® shower hose 1250 mm, chrome optic
 wall-mounted shower bracket
 wall connection elbow


HANSAVIVA
overhead shower, DN 15
for wall-mounting

shower head square 250 x 250 mm
 also compatible with HANSAMATRIX
 Item No.: 04180340
 Qty: 1
 with shower arm 400 mm
 (-) reinforced edition, pipe Ø 26 mm
 connection G 1/2
 mounting flange and additional fastening plate
 wall connection plate square, twist-resistant
 ball joint connection: 56° swivel
 limescale protection technology

HANSALIVING
electronic thermostatic mixer, DN 15 (G1/2)
suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT,
 HANSADESIGNO, HANSALIGNA, HANSASTECLA,
 HANSARONDA,
 for 2 outlets
 rosette without screws
 Item No.: 44729503
 Qty: 1
 temperature control handle (metal) with safety stop at 38°C
 HANSATIPTRONIK pushbutton with LED indicator

sleeve and wall rosette
trim plate frame
control unit
mains supply 230 V/50-60 Hz, operating voltage 12 V

Model	Item No.	
chrome	44870171	

suitable for concealed installation package
HANSAMATRIX Tiptronik 4486 0090

Connection cable and concealed box are included in the
concealed package



Product Image



Product Drawing

