

HANSALIVING


trim kit installation set 17 thermostatic mixer, DN 15 (G1/2)

suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT, HANSADESIGNO, HANSALIGNA, HANSASTECLA, HANSARONDA,

shower set

HANSAVIVA overhead shower

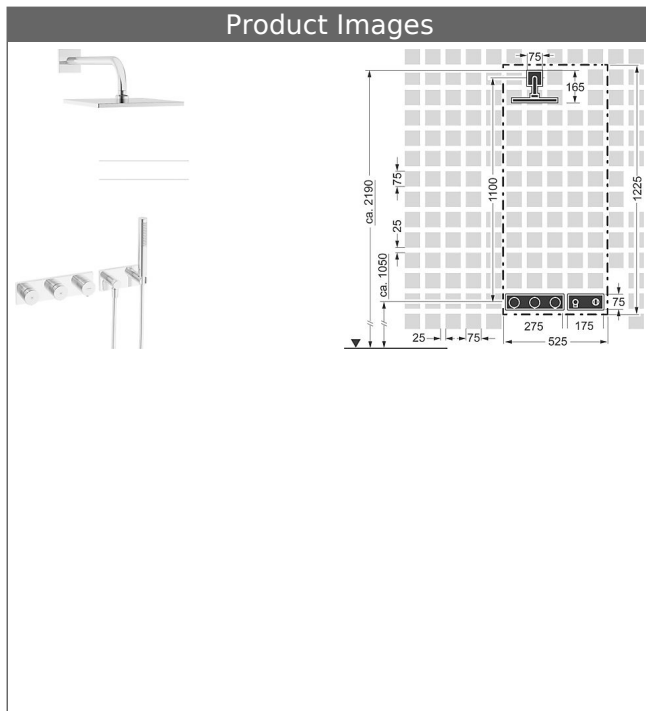

Description

HANSALIVING
trim kit installation set 17
thermostatic mixer, DN 15 (G1/2)
suitable for HANSAMATRIX Tiptronik installation unit
suitable for HANSASIGNATUR, HANSALOFT,
HANSADESIGNO, HANSALIGNA, HANSASTECLA,
HANSARONDA,
shower set
HANSAVIVA overhead shower

- power supply unit 230 V/50-60 Hz, operative voltage 12 V
- control unit

HANSA|LIVING shower set

with wall connection elbow

Item No.: 44430100

Qty: 1

HANSASTILO hand shower

Silverjet® shower hose 1250 mm, chrome optic

wall-mounted shower bracket

wall connection elbow

HANSAVIVA overhead shower, DN 15 for wall-mounting

shower head square 250 x 250 mm

also compatible with HANSAMATRIX

Item No.: 04180340

Qty: 1

with shower arm 400 mm

(-) reinforced edition, pipe Ø 26 mm

connection G 1/2

mounting flange and additional fastening plate

wall connection plate square, twist-resistant

ball joint connection: 56° swivel

limescale protection technology

HANSALIVING electronic thermostatic mixer, DN 15 (G1/2) suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT,

HANSADESIGNO, HANSALIGNA, HANSASTECLA,

HANSARONDA,

for 2 outlets

rossette without screws


Item No.: 44729503

Qty: 1

temperature control handle (metal) with safety stop at 38°C

HANSATIPTRONIK pushbutton with LED indicator

sleeve and wall rosette
trim plate frame
control unit
mains supply 230 V/50-60 Hz, operating voltage 12 V

| Model | Item No. | |
|--------------|-----------------|---|
| chrome | 44870171 |  |

suitable for concealed installation package
HANSAMATRIX Tiptronik 4486 0090

Connection cable and concealed box are included in the
concealed package



Product Image



Product Drawing

