


HANSA|LIVING
trim kit installation set 14.4
thermostatic mixer, DN 15 (G1/2)
suitable for HANSAMATRIX Tiptronik installation unit
 suitable for HANSASIGNATUR, HANSALOFT, HANSADESIGNO, HANSALIGNA, HANSASTELA,
 HANSARONDA,
 shower set
 HANSAVIVA overhead shower

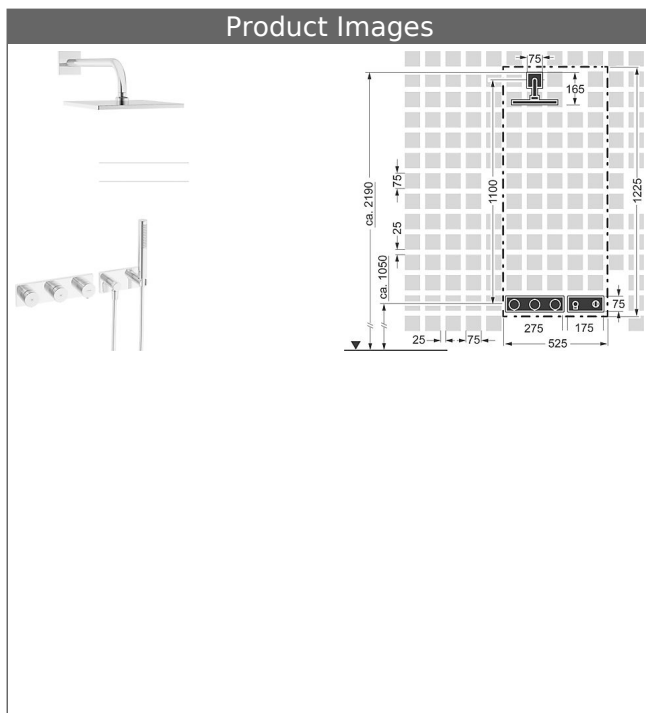

Description

HANSA|LIVING
 trim kit installation set 14.4
 thermostatic mixer, DN 15 (G1/2)
 suitable for HANSAMATRIX Tiptronik installation unit
 suitable for HANSASIGNATUR, HANSALOFT,
 HANSADESIGNO, HANSALIGNA, HANSASTELA,
 HANSARONDA,
 shower set
 HANSAVIVA overhead shower

- power supply unit 230 V/50-60 Hz, operative voltage 12 V
- control unit

HANSA|LIVING
shower set

with wall connection elbow
 Item No.: 44430100
 Qty: 1
 HANSASTILO hand shower
 Silverjet® shower hose 1250 mm, chrome optic
 wall-mounted shower bracket
 wall connection elbow

HANSAVIVA
overhead shower, DN 15
for wall-mounting


shower head square 250 x 250 mm
 also compatible with HANSAMATRIX
 Item No.: 04180340
 Qty: 1
 with shower arm 400 mm
 (-) reinforced edition, pipe Ø 26 mm
 connection G 1/2
 mounting flange and additional fastening plate
 wall connection plate square, twist-resistant
 ball joint connection: 56° swivel
 limescale protection technology

HANSA|LIVING
trim kit

electronic thermostatic mixer, DN 15 (G1/2)
suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT,
 HANSADESIGNO, HANSALIGNA, HANSASTELA,
 HANSARONDA,
 for 2 outlets
 rosette without screws
 Item No.: 44729503
 Qty: 1
 temperature control handle (metal) with safety stop at 38°C

HANSATIPTRONIK pushbutton with LED indicator
sleeve and wall rosette
trim plate frame
control unit
mains supply 230 V/50-60 Hz, operating voltage 12 V

Model	Item No.	
chrome	44870171	

suitable for concealed installation package
HANSAMATRIX Tiptronik 4486 0090

Connection cable and concealed box are included in the
concealed package



