


## HANSA|LIVING

### trim kit installation set 14.4 thermostatic mixer, DN 15 (G1/2)

#### suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT, HANSADESIGNO, HANSALIGNA, HANSASTECLA, HANSARONDA,  
shower set  
HANSAVIVA overhead shower

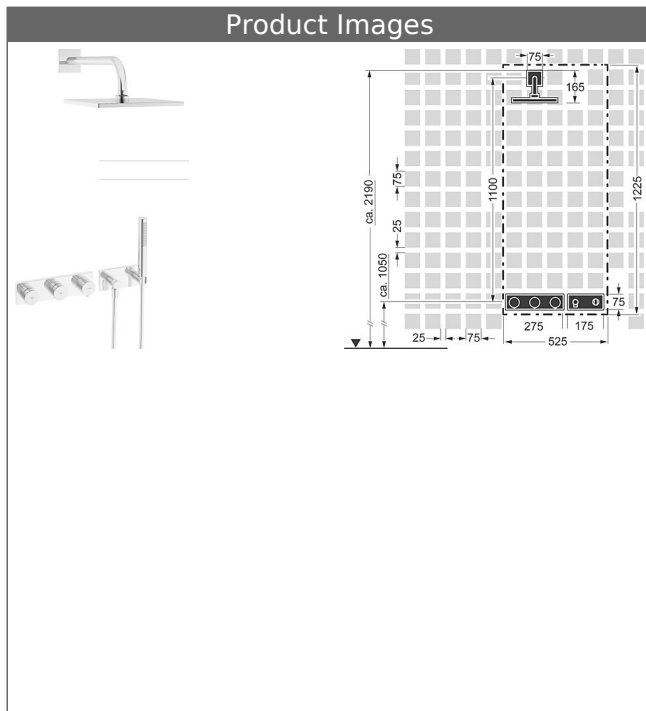

## Description

HANSA|LIVING  
trim kit installation set 14.4  
thermostatic mixer, DN 15 (G1/2)  
suitable for HANSAMATRIX Tiptronik installation unit  
suitable for HANSASIGNATUR, HANSALOFT,  
HANSADESIGNO, HANSALIGNA, HANSASTECLA,  
HANSARONDA,  
shower set  
HANSAVIVA overhead shower

- power supply unit 230 V/50-60 Hz, operative voltage 12 V
- control unit

### HANSA|LIVING shower set

with wall connection elbow

Item No.: 44430100

Qty: 1

HANSASTILO hand shower

Silverjet® shower hose 1250 mm, chrome optic

wall-mounted shower bracket

wall connection elbow

### HANSAVIVA overhead shower, DN 15 for wall-mounting

shower head square 250 x 250 mm

also compatible with HANSAMATRIX

Item No.: 04180340

Qty: 1

with shower arm 400 mm

(-) reinforced edition, pipe Ø 26 mm

connection G 1/2

mounting flange and additional fastening plate

wall connection plate square, twist-resistant

ball joint connection: 56° swivel

limescale protection technology

### HANSA|LIVING trim kit

#### electronic thermostatic mixer, DN 15 (G1/2) suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT,

HANSADESIGNO, HANSALIGNA, HANSASTECLA,

HANSARONDA,

for 2 outlets


rosette without screws

Item No.: 44729503

Qty: 1

temperature control handle (metal) with safety stop at 38°C

HANSATIPTRONIK pushbutton with LED indicator  
sleeve and wall rosette  
trim plate frame  
control unit  
mains supply 230 V/50-60 Hz, operating voltage 12 V

Model	Item No.	
chrome	44870171	

suitable for concealed installation package  
HANSAMATRIX Tiptronik 4486 0090

Connection cable and concealed box are included in the  
concealed package



Product Image



Product Drawing

