


HANSALIVING
trim kit installation set 17
thermostatic mixer, DN 15 (G1/2)

suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT, HANSADESIGNO, HANSALIGNA, HANSASTECLA, HANSARONDA, shower set
 HANSAVIVA overhead shower

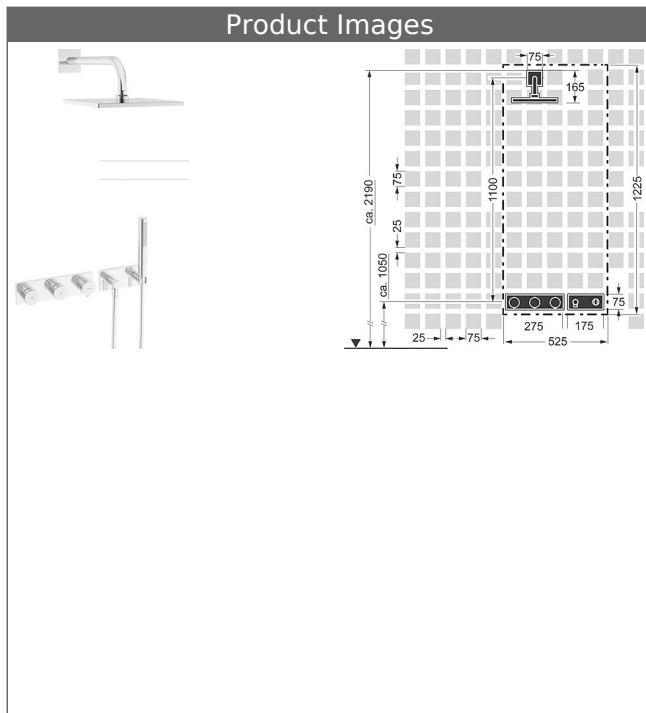

Description

HANSALIVING
 trim kit installation set 17
 thermostatic mixer, DN 15 (G1/2)
 suitable for HANSAMATRIX Tiptronik installation unit
 suitable for HANSASIGNATUR, HANSALOFT,
 HANSADESIGNO, HANSALIGNA, HANSASTECLA,
 HANSARONDA,
 shower set
 HANSAVIVA overhead shower

- power supply unit 230 V/50-60 Hz, operative voltage 12 V
- control unit

HANSA|LIVING
shower set

with wall connection elbow

Item No.: 44430100

Qty: 1

HANSASTILO hand shower

Silverjet® shower hose 1250 mm, chrome optic

wall-mounted shower bracket

wall connection elbow

HANSAVIVA
overhead shower, DN 15
for wall-mounting

shower head square 250 x 250 mm

also compatible with HANSAMATRIX

Item No.: 04180340

Qty: 1

with shower arm 400 mm

(-) reinforced edition, pipe Ø 26 mm

connection G 1/2

mounting flange and additional fastening plate

wall connection plate square, twist-resistant

ball joint connection: 56° swivel

limescale protection technology

HANSALIVING
electronic thermostatic mixer, DN 15 (G1/2)
suitable for HANSAMATRIX Tiptronik installation unit

suitable for HANSASIGNATUR, HANSALOFT,

HANSADESIGNO, HANSALIGNA, HANSASTECLA,

HANSARONDA,

for 2 outlets

rossette without screws

Item No.: 44729503


Qty: 1

temperature control handle (metal) with safety stop at

38°C

HANSATIPTRONIK pushbutton with LED indicator

sleeve and wall rosette
trim plate frame
control unit
mains supply 230 V/50-60 Hz, operating voltage 12 V

Model	Item No.	
chrome	44870171	

suitable for concealed installation package
HANSAMATRIX Tiptronik 4486 0090

Connection cable and concealed box are included in the
concealed package



