


**HANSAMATRIX Tiptronik
installation unit set 15.0
thermostatic mixer, DN 15 (G1/2)
for one wall outlet**

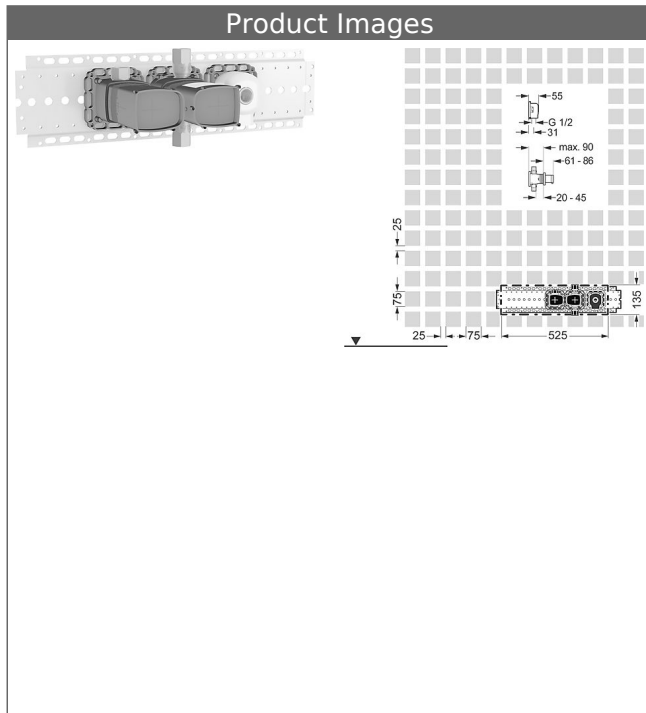

Description

HANSAMATRIX Tiptronik
installation unit set 15.0
thermostatic mixer, DN 15 (G1/2)
for one wall outlet

P-IX* (PA-IX submitted)
flow rate: 21 l/min, at 3 bar hydraulic pressure and
without restrictors

**HANSAMATRIX
concealed installation unit, DN 15 (G 1/2)
connection angle**

Item No.: 44040000

Qty: 1

female thread, G 1/2
body: DR brass (MS 63)
multifix fastening system
insulating pack, styrofoam

**HANSAMATRIX
assembly rail**

suitable for HANSAMATRIX and HANSABLUEBOX
for accurate and simple assembly of the installation unit
Item No.: 44050000

Qty:2

assembly rail with fixing possibilities in 25 mm raster
fixing screws for the assembling valves
assembling rail can be extended using further rails

**HANSAMATRIX Tiptronik
concealed installation unit, DN 15 (G 1/2)
thermostatic mixer**

for 1 outlet

Item No.: 44080000

Qty:3

installation depth: 65-90 mm

Extension of the installation depth by 5 mm by fastening
on the assembly rail.

body: DR brass (MS 63)

mounting box and cover sleeve: plastic

(-) with gasket sleeve

(-) suitable for dry mortarless construction

multifix fastening system

connection cable 10.0 m

concealed two chamber electronics box

safety stop against scalding at 38°C

integrated maintenance unit

(-) strainer

(-) backflow preventer

all connections G1/2

noise insulation

protected against back-flow in domestic use (according
to DIN EN 1717)

Model

Item No.

44860100



conduit Ø 16 mm site provide


For the complete installation unit please order the concealed installation package and a trim kit installation package.

4405 0100 assembly angle set (pack: 2 pieces) to be ordered on request

rinsing according to DIN EN 806-4 with special plug no. 59 913 589



Product Image

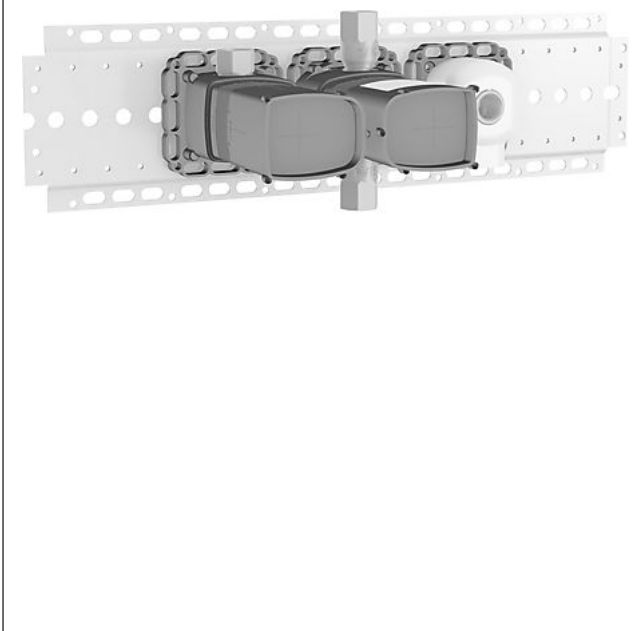

Product Drawing

