


**HANSAUNITA**  
**thermostatic shower faucet, DN 15 (G 1/2)**  
 for wall-mounting  
 with protection against scalding  
 centre distance: 120 mm

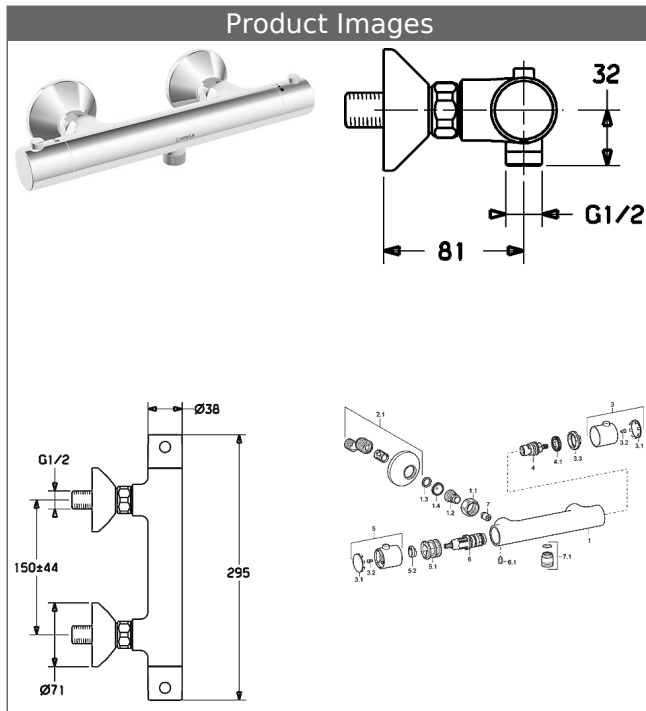

**Description**

HANSAUNITA  
 thermostatic shower faucet, DN 15 (G 1/2)  
 for wall-mounting  
 with protection against scalding  
 centre distance: 120 mm  
 PA-IX 19654/IB  
 flow rate: 19 l/min, at 3 bar hydraulic pressure

- body: DR brass (MS 63)
- THERMO COOL - function
- operating handles
- volume valve with ceramic discs
- water rate economy button
- safety stop against scalding at 38°C
- retrofittable temperature limiter at approximately 38 °C
- eccentric connections
- strainer and backflow preventer in connections
- protected against back-flow in domestic use (according to DIN EN 1717)


**HANSA 2.7 thermostat cartridge without volume control**

Item No.: 59913823  
 Qty: 1  
 (-) strainer  
 (-) with wax element  
 (-) not rising spindle  
 suitable for thermal disinfection DVGW W 551 with non-assembled temperature locking

**HANSA 2.7 thermostat cartridge without volume control**

Item No.: 59913823  
 Qty: 1  
 (-) strainer  
 (-) with wax element  
 (-) not rising spindle  
 suitable for thermal disinfection DVGW W 551 with non-assembled temperature locking


Model	Item No.	
chrome	58130301	




Product Image



Product Drawing

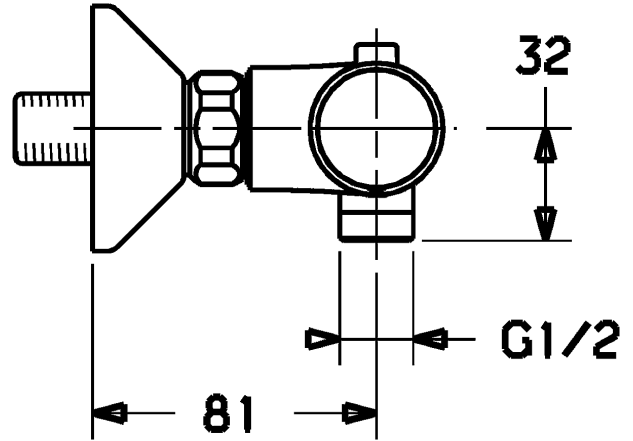

Product Drawing

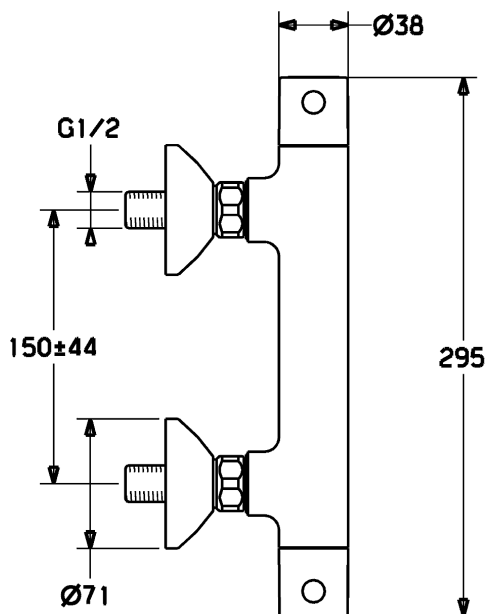

Product Drawing

