


**HANSAUNITA**  
**thermostatic bath faucet, DN 15 (G1 /2)**  
 for wall-mounting  
 with protection against scalding

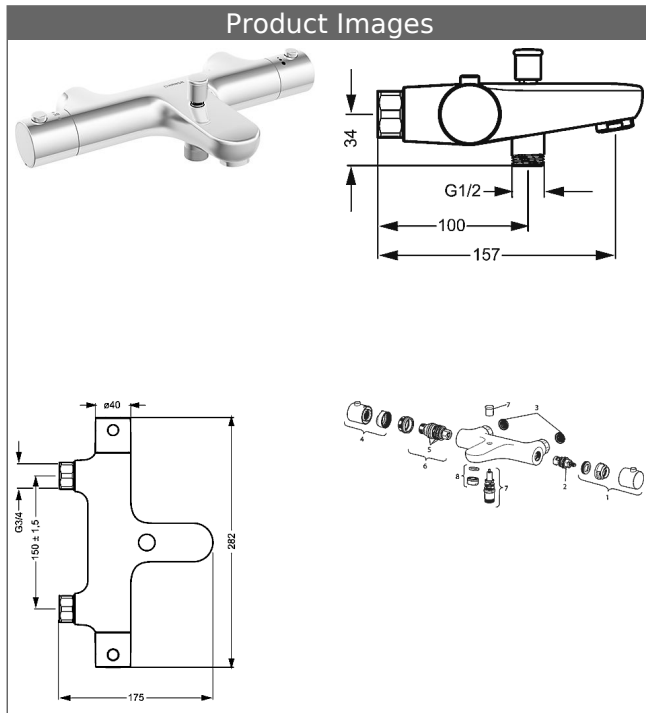

**Description**

HANSAUNITA  
 thermostatic bath faucet, DN 15 (G1 /2)  
 for wall-mounting  
 with protection against scalding

PA-IX 19654/IB  
 flow rate: 20/19 l/min (spout/shower), at 3 bar hydraulic pressure

- body: DR brass (MS 63)
- THERMO COOL - function
- operating handles
- volume valve with ceramic discs
- water rate economy button
- safety stop against scalding at 38°C
- without eccentric connections
- strainer and backflow preventer in connections
- protected against back-flow in domestic use (according to DIN EN 1717)

**HANSA 3.4 thermostate cartridge without volume control**

Item No.: 59914114

Qty: 1


- (-) strainer
- (-) with wax element
- (-) not rising spindle


**HANSA 3.4 thermostate cartridge without volume control**

Item No.: 59914114

Qty: 1

- (-) strainer
- (-) with wax element
- (-) not rising spindle


Model	Item No.	
chrome	58372001	




Product Image



Product Drawing

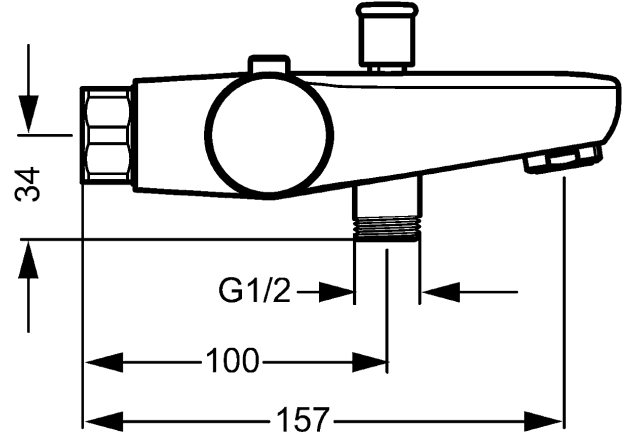

Product Drawing

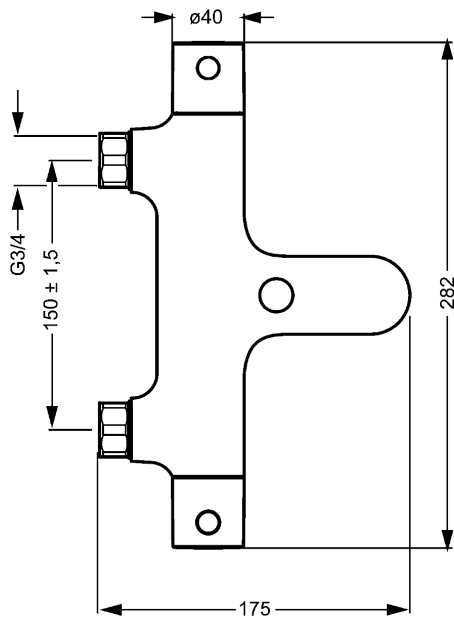

Product Drawing

