


**HANSAMATRIX Tiptronik  
installation unit set 09  
thermostatic mixer, DN 15 (G1/2)  
for two wall outlets**

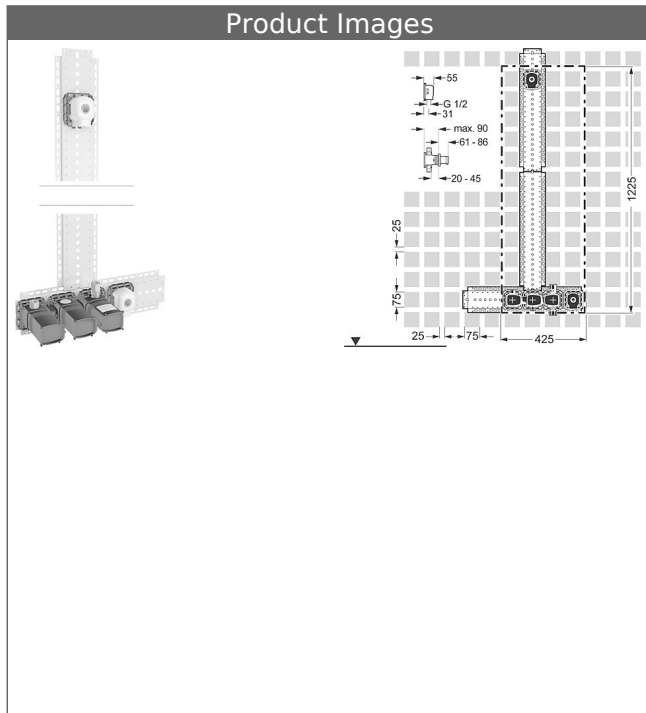

**Description**

HANSAMATRIX Tiptronik  
installation unit set 09  
thermostatic mixer, DN 15 (G1/2)  
for two wall outlets

P-IX\* (PA-IX submitted)  
flow rate: 21 l/min, at 3 bar hydraulic pressure and  
without restrictors

- connection cable 10.0 m
- concealed two chamber electronics box

**HANSAMATRIX  
concealed installation unit, DN 15 (G 1/2)  
connection angle**

Item No.: 44040000

Qty: 1

female thread, G 1/2  
body: DR brass (MS 63)  
multifix fastening system  
insulating pack, styrofoam

**HANSAMATRIX  
assembly rail  
suitable for HANSAMATRIX and HANSABLUebox**  
for accurate and simple assembly of the installation unit

Item No.: 44050000

Qty:2

assembly rail with fixing possibilities in 25 mm raster  
fixing screws for the assembling valves  
assembling rail can be extended using further rails

**HANSAMATRIX Tiptronik  
concealed installation unit, DN 15 (G 1/2)  
thermostatic mixer**



for 2 outlets

Item No.: 44070000


Qty:3

installation depth: 65-90 mm  
Extension of the installation depth by 5 mm by fastening  
on the assembly rail.

body: DR brass (MS 63)  
mounting box and cover sleeve: plastic  
(-) with gasket sleeve  
(-) suitable for dry mortarless construction  
multifix fastening system  
connection cable 10.0 m  
concealed two chamber electronics box  
safety stop against scalding at 38°C  
integrated maintenance unit  
(-) strainer  
(-) backflow preventer  
all connections G1/2  
noise insulation  
protected against back-flow in domestic use (according  
to DIN EN 1717)

Model	Item No.
	44860090 
<p>conduit Ø 16 mm site provide</p> <p>For the complete installation unit please order the concealed installation package and a trim kit installation package.</p> <p>4405 0100 assembly angle set (pack: 2 pieces) to be ordered on demand</p> <p>rinsing according to DIN EN 806-4 with special plug no. 59 913 589</p> 	

Product Image

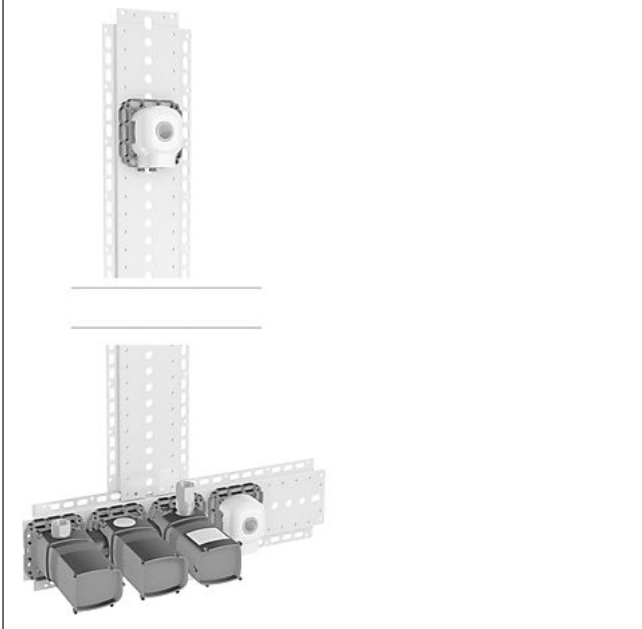

Product Drawing

